




## Damping Foil 2552

### Typical Damping Properties (continued)

Test Method: The following data were obtained by doing a frequency sweep from 1 to 100 radians/sec (0.16 to 16 Hz) at 5 different temperatures: -20°, 10°, 0°, 10°, and 22°C (-4, 50, 32, 50, 71.6°F). A 3 point bend geometry was used on the Rheometrics RSA II. Time – temperature superposition was used to create the master curve for a reference temperature of 22°C.

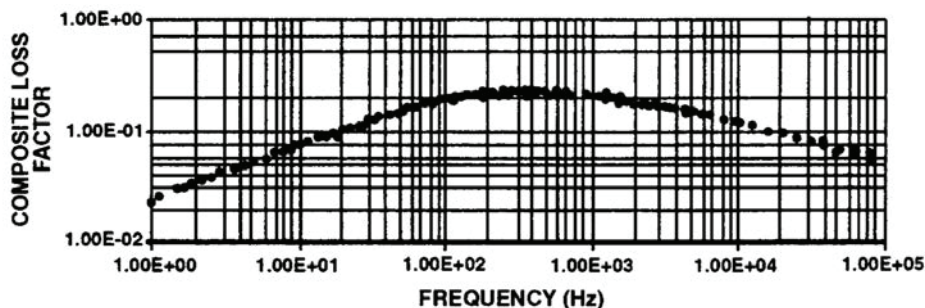

#### Data Interpolation:

To determine the damping properties at ambient temperature 22°C (72°F), proceed as follows:

- 1) Locate the desired frequency on the bottom HORIZONTAL scale
- 2) Follow the chosen frequency up to the point of intersection with the plotted data
- 3) From this intersect, go left to the vertical scale
- 4) Read the COMPOSITE LOSS FACTOR for the chosen frequency

**Note:** Please note that the data has been determined by combining 3M™ Damping Foil 2552 with a panel of 0.045 cm (0.018") thick stainless steel with a hardness of T-22 and is presented as a reference to the damping that can be achieved when combined with a material of this description and tested at ambient temperature of 22°C (72°F).

### Solvent and Fuel Resistance

When properly laminated between two impervious materials, the polymer will resist intermittent exposure to mild acids and alkalis, most oils, grease, gasoline, kerosene, JP-4 fuel, hydraulic fluids, and other typical aromatic and aliphatic hydrocarbon and ketone solvents.

**Note:** Continuous submersion in chemical solutions like solvents or fuels is not recommended.

## Damping Foil 2552

### Product Construction and Typical Physical Properties

**Note:** The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

		ASTM Test Method
<b>Aluminum Backing:</b>	0.25 mm (10.0 mils)	
<b>Acrylic Viscoelastic Polymer:</b>	0.13 mm (5.0 mils)	
<b>Easy-release Liner:</b>	58# poly-coated paper	
<b>Total Product Thickness:</b>	0.38 mm (15.0 mils)	
<b>Total Product Weight:</b>	0.17 lbs./sq. ft.	
<b>Adhesion to Steel:</b>	72 N/100 mm (65 oz./in. width)	D-3330
<b>Tensile Strength:</b>	2205 N/100 mm (126 lbs./in. width)	D-3759
<b>Elongation at Break:</b>	12%	D-3759
<b>Temperature Use Range:</b>	-32°C to 80°C (-25°F to 175°F) Peak damping from 0°C to 60°C (32°F to 140°F)	
<b>Minimum and Maximum Widths:</b>	5 cm (2 in.) minimum, 59.6 cm (23.5 in.) maximum	
<b>Available Formats:</b>	Roll Lengths: Standard length 32.9 m (36 yds). <ul style="list-style-type: none"> <li>• 5 cm to 10.1 cm (2" to 4"): up to 164.5 m (180 yds).</li> <li>• Wider widths available to 164.5 m (180 yds).</li> <li>• Dispensers available for purchase through 3M</li> </ul> <p><b>Sheets and Die-Cut Parts:</b> 3M can introduce you to fabricators with a background of handling this product and the capability to provide sheet goods and die cut dampers to customer specifications.</p> <p><b>Custom Dispensers:</b> Designed for manual or automatic operation, this custom dispenser removes protective liner from 3M™ Damping Foil 2552 before cutting to a predetermined length. Built to hold and dispense 15.2 cm (6") core with a roll size up to 5 cm (2") wide by 98.7 m (108 yds). Engineered for tabletop usage, this custom dispenser measures 78.7 cm L x 55.8 cm H x 25.4 cm W (31"L x 22"H x 10"W) and weighs only 20.4 kg (45 lbs).</p>	

### Characteristics

- Excellent aging qualities of the polymer
- Wide temperature range for damping: usable from -32°C to 80°C (-25°F to 175°F), with peak damping from 0°C to 60°C (32°F to 140°F)
- Liner on product offers the user die-cut capability
- Pressure-sensitive adhesive for ease of application
- Meets flame retardancy requirements of F.A.R. Part 25.853(a)
- Can pass ASTM E-162 and ASTM E-662 for flammability and smoke generation

### Application Ideas

- Industrial applications.
- Electronic equipment and appliances.
- Reduce resonant noise, vibration and fatigue in metal, plastic panels and support structures.
- Almost anywhere plastic or metal contact with materials can result in potentially damaging vibration.

# Damping Foil 2552

---

## Technical Information

The technical information, recommendations and other statements contained in this document are based upon tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed.

## Product Use

Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application.

## Warranty, Limited Remedy, and Disclaimer

Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

## Limitation of Liability

Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

## ISO 9001:2008

This Industrial Adhesives and Tapes Division product was manufactured under a 3M quality system registered to ISO 9001: 2008 standards.



**3M Industrial Adhesives and Tapes Division**

**3M Canada**

P.O. Box 5757

London, ON N6A 4T1

Phone 1-800-364-3577

Web 3M.ca/AssemblySolutions