


August, 2013

## 3M™ Polyester Film Tape 850

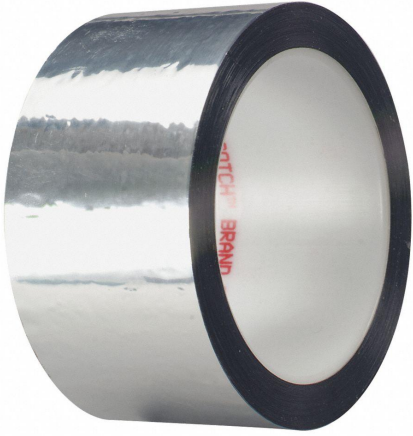

### Product Description

3M™ Polyester Film Tape 850 can generally be used for splicing and applications where chemical resistance and/or clean removal is necessary. The silver backing is a transparent polyester with a thin layer of aluminum.

### Product Features

- Prolonged exposure to sunlight or hot caustics will cause backing to become brittle and lose tensile strength.
- Thin, high strength polyester film helps reduce failures due to breakage while meeting low caliper requirements.
- Chemical and solvent resistance to help reduce rejects produced from chemical and solvent attack.
- Abrasion resistant to help protect surfaces from abrasion and rough handling.
- Variety of colors offered when easy detection is required.

# 3M™ Polyester Film Tape 850

## Technical Information Note

The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

## Typical Physical Properties

Property	Values		Method
Color	Silver		
Backing Thickness	0.02 mm	0.9 mil	ASTM D3652
Backing	Polyester		
Adhesive	Acrylic		
Water Vapor Transmission Rate	24.8 g/m <sup>2</sup> /24 hr	1.6 g/100 in <sup>2</sup> /24 hr	ASTM D3833

## Typical Performance Characteristics

Property	Values		Method	Substrate
Peel Adhesion	3.3 N/cm	30 oz/in	ASTM D3330	Stainless Steel
Tensile Strength	49 N/cm	448 oz/in	ASTM D3759	
Elongation at Break	120 %		ASTM D3759	
Temperature Use Range	-50 to 150 °C	-60 to 300 °F		

## Available Sizes

Property	Values	
Standard Roll Length	65.8 m	72 yd

## Handling/Application Information

### Application Ideas

- Splicing and web defect marking.
- Sealing, labeling, and protecting.
- Positive film striping (transparent).
- Decorative edging.
- Tape hinge.

### Storage and Shelf Life

Store under normal conditions of 60° to 80°F (16° to 27°C) and 40 to 60% relative humidity in the original packaging material. To obtain best performance, use this product within 18 months from date of manufacture.

# 3M™ Polyester Film Tape 850

## Information

**Technical Information:** The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.

**Product Selection and Use:** Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

**Warranty, Limited Remedy, and Disclaimer:** Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

**Limitation of Liability:** Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.

## Trademarks

3M is a trademark of 3M Company.

## References

### Safety Data Sheet (SDS)

[https://www.3m.com/3M/en\\_US/company-us/SDS-search/results/?gsaAction=msdsSRA&msdsLocale=en\\_US&co=ptn&q=850](https://www.3m.com/3M/en_US/company-us/SDS-search/results/?gsaAction=msdsSRA&msdsLocale=en_US&co=ptn&q=850)

## Family Group

	850	850 Silver
Color	Transparent, Red, Black, White	Silver
Backing Thickness (mm)	0.02	0.02
Backing	Polyester	Polyester
Adhesive	Acrylic	Acrylic
Tensile Strength (N/cm)	49	49